

RS2AW~RS2MW

Rev.E Oct.-2017

描述 / Descriptions

快恢复二极管，反向电压：50V~1000V，正向电流：2.0A，薄型 SOD-123FL 封装。

Surface Mount Fast Recovery Rectifiers, Reverse Voltage: 50 to 1000V, Forward Current: 2.0A, SOD-123FL thin package.

特征 / Features

玻璃钝化芯片，无铅符合欧盟 RoHS 指令 2011/65/EU，适用于表面贴装。无卤产品。

Glass Passivated Chip Junction, Lead free in comply with EU RoHS 2011/65/EU directives, For surface mounted applications. Halogen free product.

用途 / Applications


一般用途。

General purpose.

内部等效电路 / Equivalent Circuit




引脚排列 / Pinning



| PIN | DESCRIPTION |
|-----|-------------|
| 1 | Cathode |
| 2 | Anode |

The recommended mounting pad size

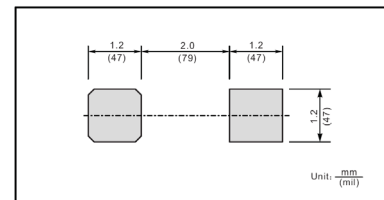

印章代码 / Marking

见印章说明。See Marking Instructions.

极限参数 / Absolute Maximum Ratings(Ta=25°C)

| 参数 Parameter | 符号 Symbol | 数值 Rating | | | | | | | 单位 Unit |
|---|-----------------|--------------|-------|-------|-------|-------|-------|-------|------------|
| | | RS2AW | RS2BW | RS2DW | RS2GW | RS2JW | RS2KW | RS2MW | |
| Maximum Repetitive Peak Reverse Voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC Blocking Voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum Average Forward Rectified Current at Ta= 65°C | $I_{F(AV)}$ | 2.0 | | | | | | | A |
| Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method) | I_{FSM} | 50 | | | | | | | A |
| Typical Junction Capacitance at VR=4V, f=1MHz | C_j | 40 | | | | | | | pF |
| Typical Thermal Resistance ¹⁾ | $R_{\theta JA}$ | 90 | | | | | | | °C/W |
| Operating and Storage Temperature Range | T_j, T_{stg} | -55~+150 | | | | | | | °C |






Note:

1) P.C.B. mounted with 0.2 X 0.2" (5 X 5 mm) copper pad areas.

电性能参数 / Electrical Characteristics(Ta=25°C)


| 参数 Parameter | 符号 Symbol | 测试条件 Test Conditions | 数值 Rating | | | | | | 单位 Unit |
|---|--------------|---|--------------|-------|-------|-------|-------|-------|------------|
| | | | RS2AW | RS2BW | RS2DW | RS2GW | RS2JW | RS2KW | |
| Maximum Forward Voltage | V_F | $I_F=2.0A$ | 1.3 | | | | | | V |
| Maximum DC Reverse Current at Maximum DC Blocking Voltage | I_R | $T_a=25^\circ C$ | 5.0 | | | | | | μA |
| | | $T_a=125^\circ C$ | 100 | | | | | | μA |
| Maximum Reverse Recovery Time | t_{rr} | $I_F=0.5A$ $I_R=1A$ $I_{rr}=0.25A.$ | 150 | | | | 250 | 500 | ns |

电参数曲线图 / Electrical Characteristic Curve

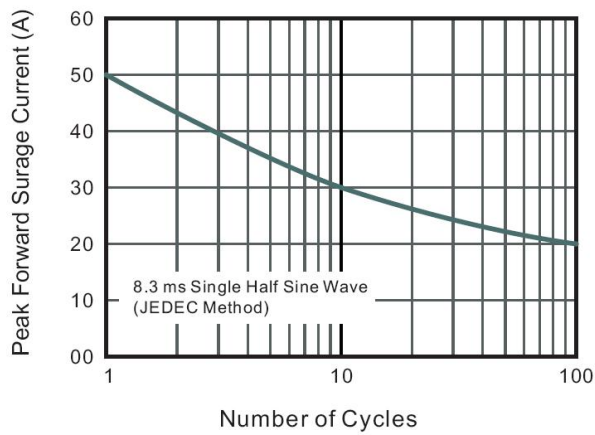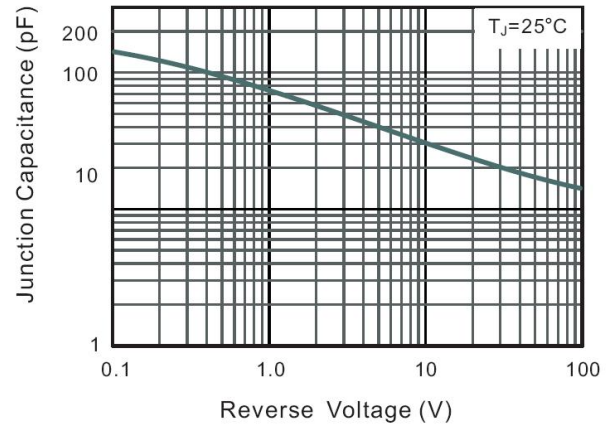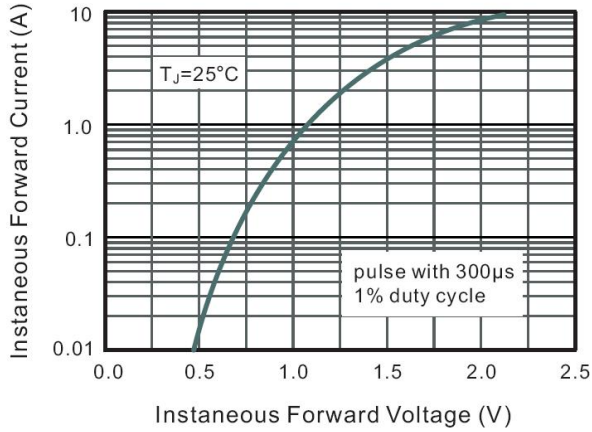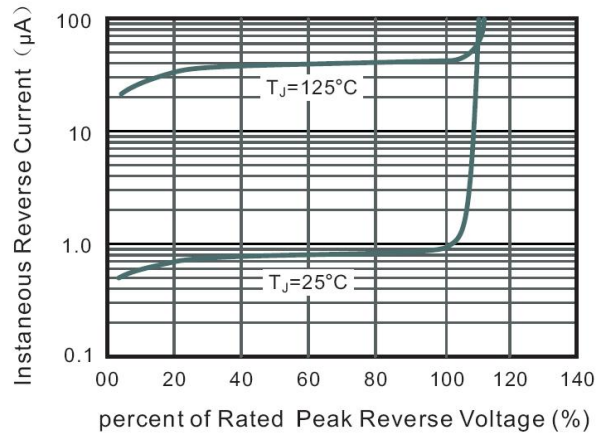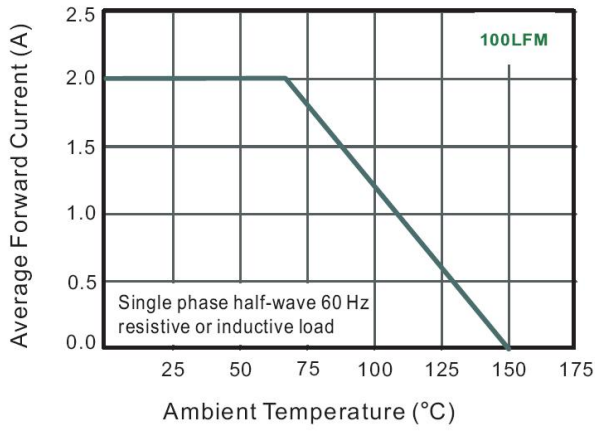

外形尺寸图 / Package Dimensions

SOD-123FL

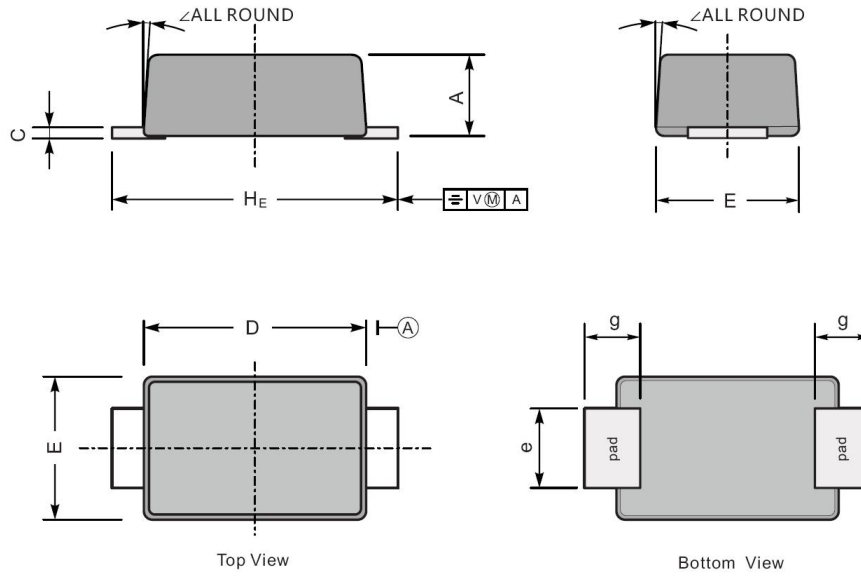


| UNIT | | A | C | D | E | e | g | H _E | ∠ |
|------|-----|-----|------|-----|-----|-----|-----|----------------|----|
| mm | max | 1.1 | 0.20 | 2.9 | 1.9 | 1.1 | 0.9 | 3.8 | 7° |
| | min | 0.9 | 0.12 | 2.6 | 1.7 | 0.8 | 0.7 | 3.5 | |
| mil | max | 43 | 7.9 | 114 | 75 | 43 | 35 | 150 | |
| | min | 35 | 4.7 | 102 | 67 | 31 | 28 | 138 | |

Marking

| Type number | Marking code |
|-------------|--------------|
| RS2AW | 2F2 |
| RS2BW | |
| RS2DW | |
| RS2GW | |
| RS2JW | 2F5 |
| RS2KW | 2F7 |
| RS2MW | |

印章说明 / Marking Instructions

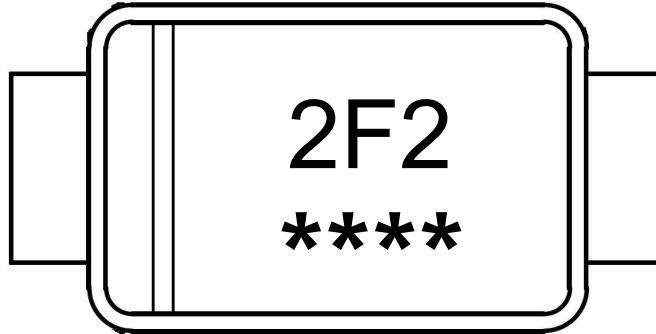

说明：

2F2： 为型号代码

****： 为生产批号追溯码，第1个*为年月代码，后面3个*为当月小批号代码

Note:

2F2： Product Type Code

****： Lot No. Code ,The 1st * means:YM Code ,The last 3 * means:little Lot No Code

回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)



说明：

- 1、预热温度 25 ~ 150°C，时间 60 ~ 90sec;
- 2、峰值温度 245±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2 ~ 10°C/sec.

Note:

- 1.Preheating:25~150°C, Time:60~90sec.
- 2.Peak Temp.:245±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：260±5°C

时间：10±1 sec.

Temp.:260±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

| Package Type 封装形式 | Units 包装数量 | | | | | Dimension 包装尺寸 (unit: mm ³) | | |
|----------------------|--------------------|-------------------------|------------------------|------------------------------|------------------------|---|-------------|-------------|
| | Units/Reel 只/卷盘 | Reels/Inner Box 卷盘/盒 | Units/Inner Box 只/盒 | Inner Boxes/Outer Box 盒/箱 | Units/Outer Box 只/箱 | Reel | Inner Box 盒 | Outer Box 箱 |
| SOD-123FL | 3000 | 8 | 24000 | 5 | 120000 | 7" ×11 | 185X180X105 | 390X385X205 |

使用说明 / Notices